




CREATE A STRIKING CUSTOM SHOWPIECE FROM THE FLOOR UP USING HURFORD HERRINGBONE ENGINEERED PARQUET FLOORING.

Each block of Hurford Herringbone is carefully constructed using a prime grade Oak lamella for the wear layer, which is bonded to a strong Eucalyptus plywood core and reinforced with a veneer backing. This type of construction ensures product stability and the highest level of quality assurance.



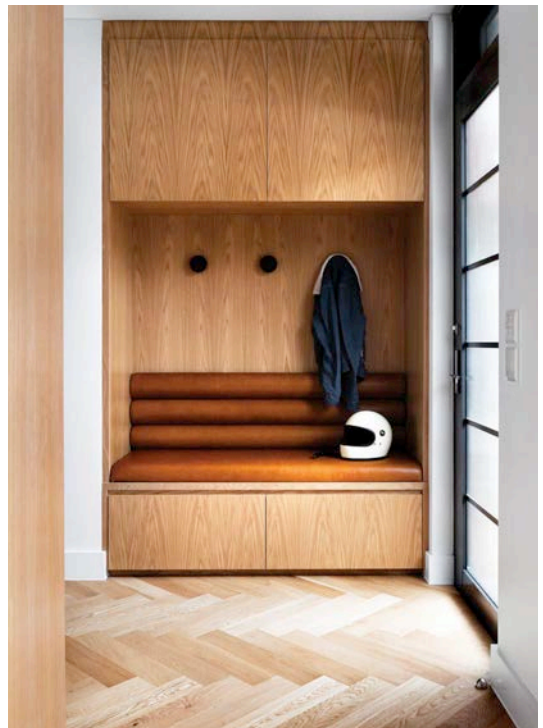

ADD A CUSTOMISED STAIN AND FINISH.

Hurford Herringbone has been produced leaving an unfinished, uncoated RAW surface. RAW is the ideal selection to achieve a custom design vision, with limitless choices of stains and finishes to reflect one's personal taste or style.



Specifications...

Species:	Oak
Colour Stains:	RAW (unfinished)
Appearance:	Prime
Core Material:	Plantation Eucalyptus Plywood
Locking System:	Tongue and Groove (ends and sides)
Profile:	Square edge (ends and sides)
Size:	120mm x 14mm
Wear Layer:	3mm lamella
Length:	600mm
Surface:	Smooth, lightly sanded
Coating:	Uncoated
Finish:	Unfinished
Coverage:	1.728M ² /box
Packaging:	24 pieces per box
Install Suitability:	Direct glued
Install Sub-Floor Heating:	Yes
Install Over:	Wood, concrete, plywood & plywood over concrete
Colour Match Accessories:	N/A

Installing Hurford Herringbone requires a high level of skill and Hurford Flooring recommends only qualified tradespeople with the relevant skill levels undertake the installation.

Hurford Herringbone is sold as an uncoated, unfinished product. Stains listed are for illustrative purposes.



Black



Castle Brown



Charcoal



Chocolate



Cotton White



Havana



Mist



Mud Light



Oyster



Pure



Slate Grey



Smoke

Showroom: Unit 11 / 18 Corinthian Drive, Albany,
Auckland 0632 - BY APPOINTMENT ONLY
Phone: 0800 HURFORD | **Email:** info@hurfordflooring.co.nz
Web: www.hurfordflooring.co.nz

